


Plastic

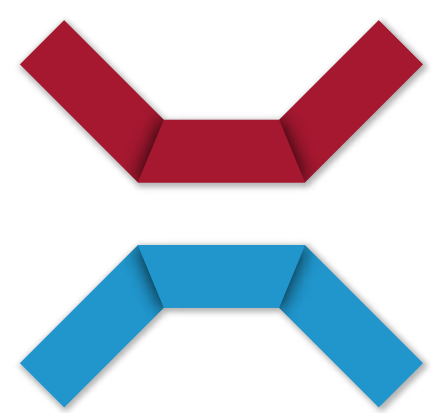

HOLMAK

Healthier environments,
happier people.

**Counterflow Heat
Exchangers from Holmak**

Cutting-edge technology for ventilation with heat recovery.

We supply plastic heat exchangers for central and decentral ventilation systems with excellent performance rates.

PLASTIC HEAT EXCHANGERS FROM HOLMAK

- High manufactured quality based on a longstanding production track record
- Short lead times thanks to highly flexible production and logistics
- Drawing on cutting-edge technology
- Specific design increases high efficiency at all air volumes

Counterflow principle:

when separate supply and return airflows pass each other in opposite directions, the warm air in one duct can heat up the cold air in the other duct by means of thin, parallel, highly conductive plastic plates. The principle of course also works in reverse, for cooling down warm air.



Extensive product portfolio for a wide range of applications.


Thanks to the broad functionality of our products and the flexibility of our organisation ensures we are in a position to meet a wide range of requirements.



Holmak counterflow heat exchangers are used as key components in a broad range of ventilation systems. Our goal is always to achieve an efficient exchange of cooling or heating energy

- for central ventilation,
- for decentral ventilation,
- for heat recovery in winter,
- for cold recovery in summer.

Our products are distributed worldwide and used in wide-ranging reference projects.


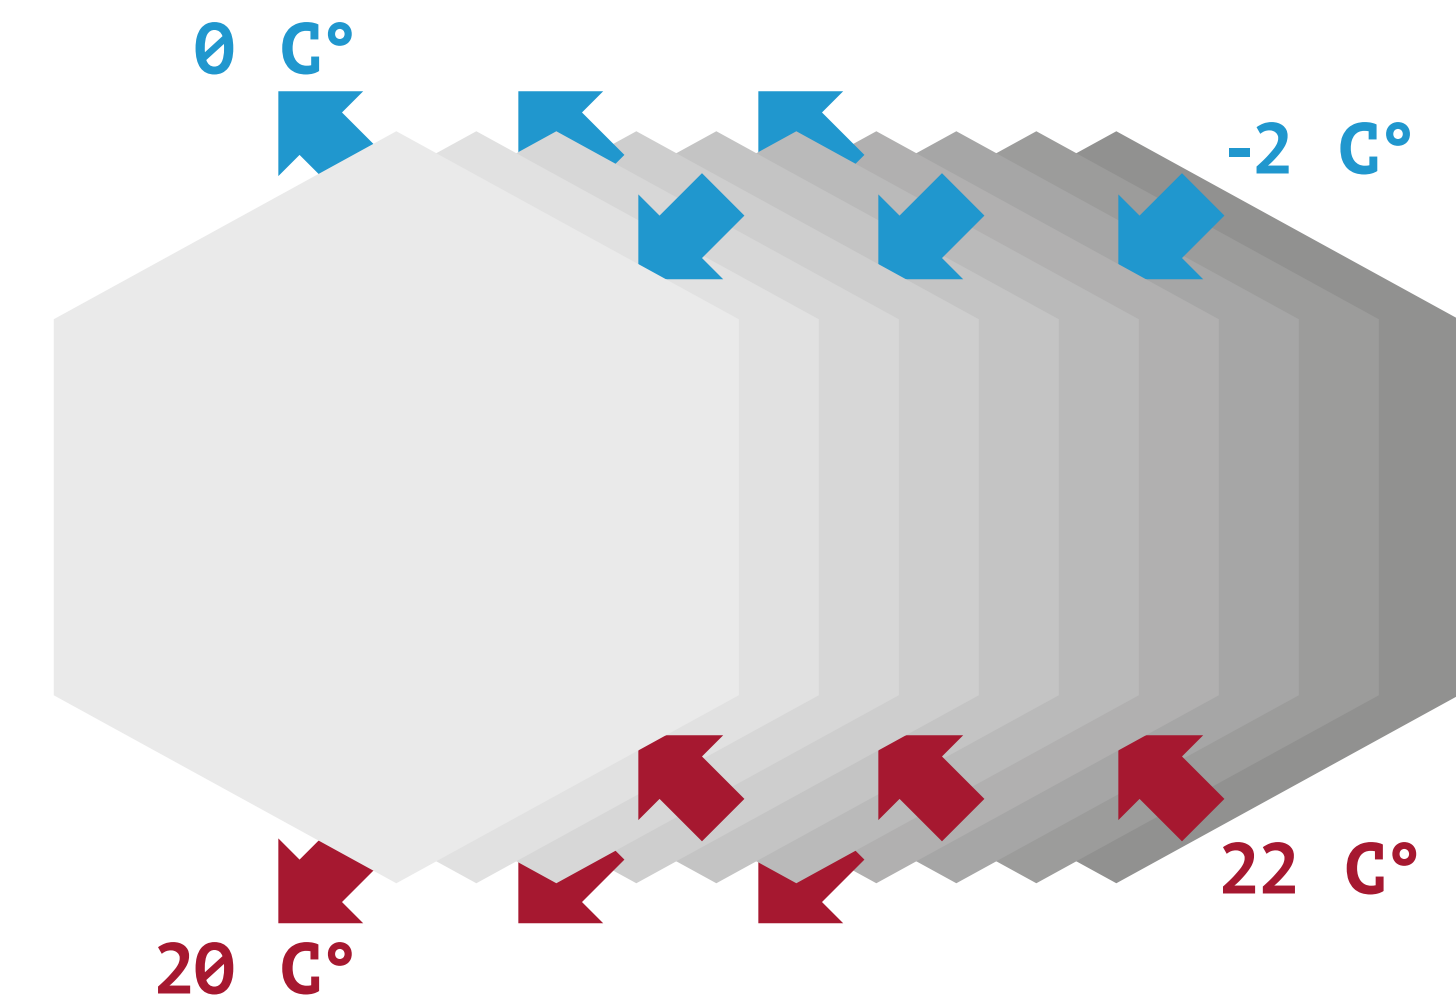


Plastic Heat Exchangers

Class A hygiene comes as standard.

Plastic heat exchangers are used to optimize ventilation in home and office space. Made from high quality PET materials, and also available on request with B2 fire-class certification, Holmak plastic heat exchangers are produced and manufactured to the highest Eurovent standards and according to the EN308 norms. With up to 98% efficiency, plastic heat exchangers can be used in a broad range of domestic and office ventilation systems.

GS-K line

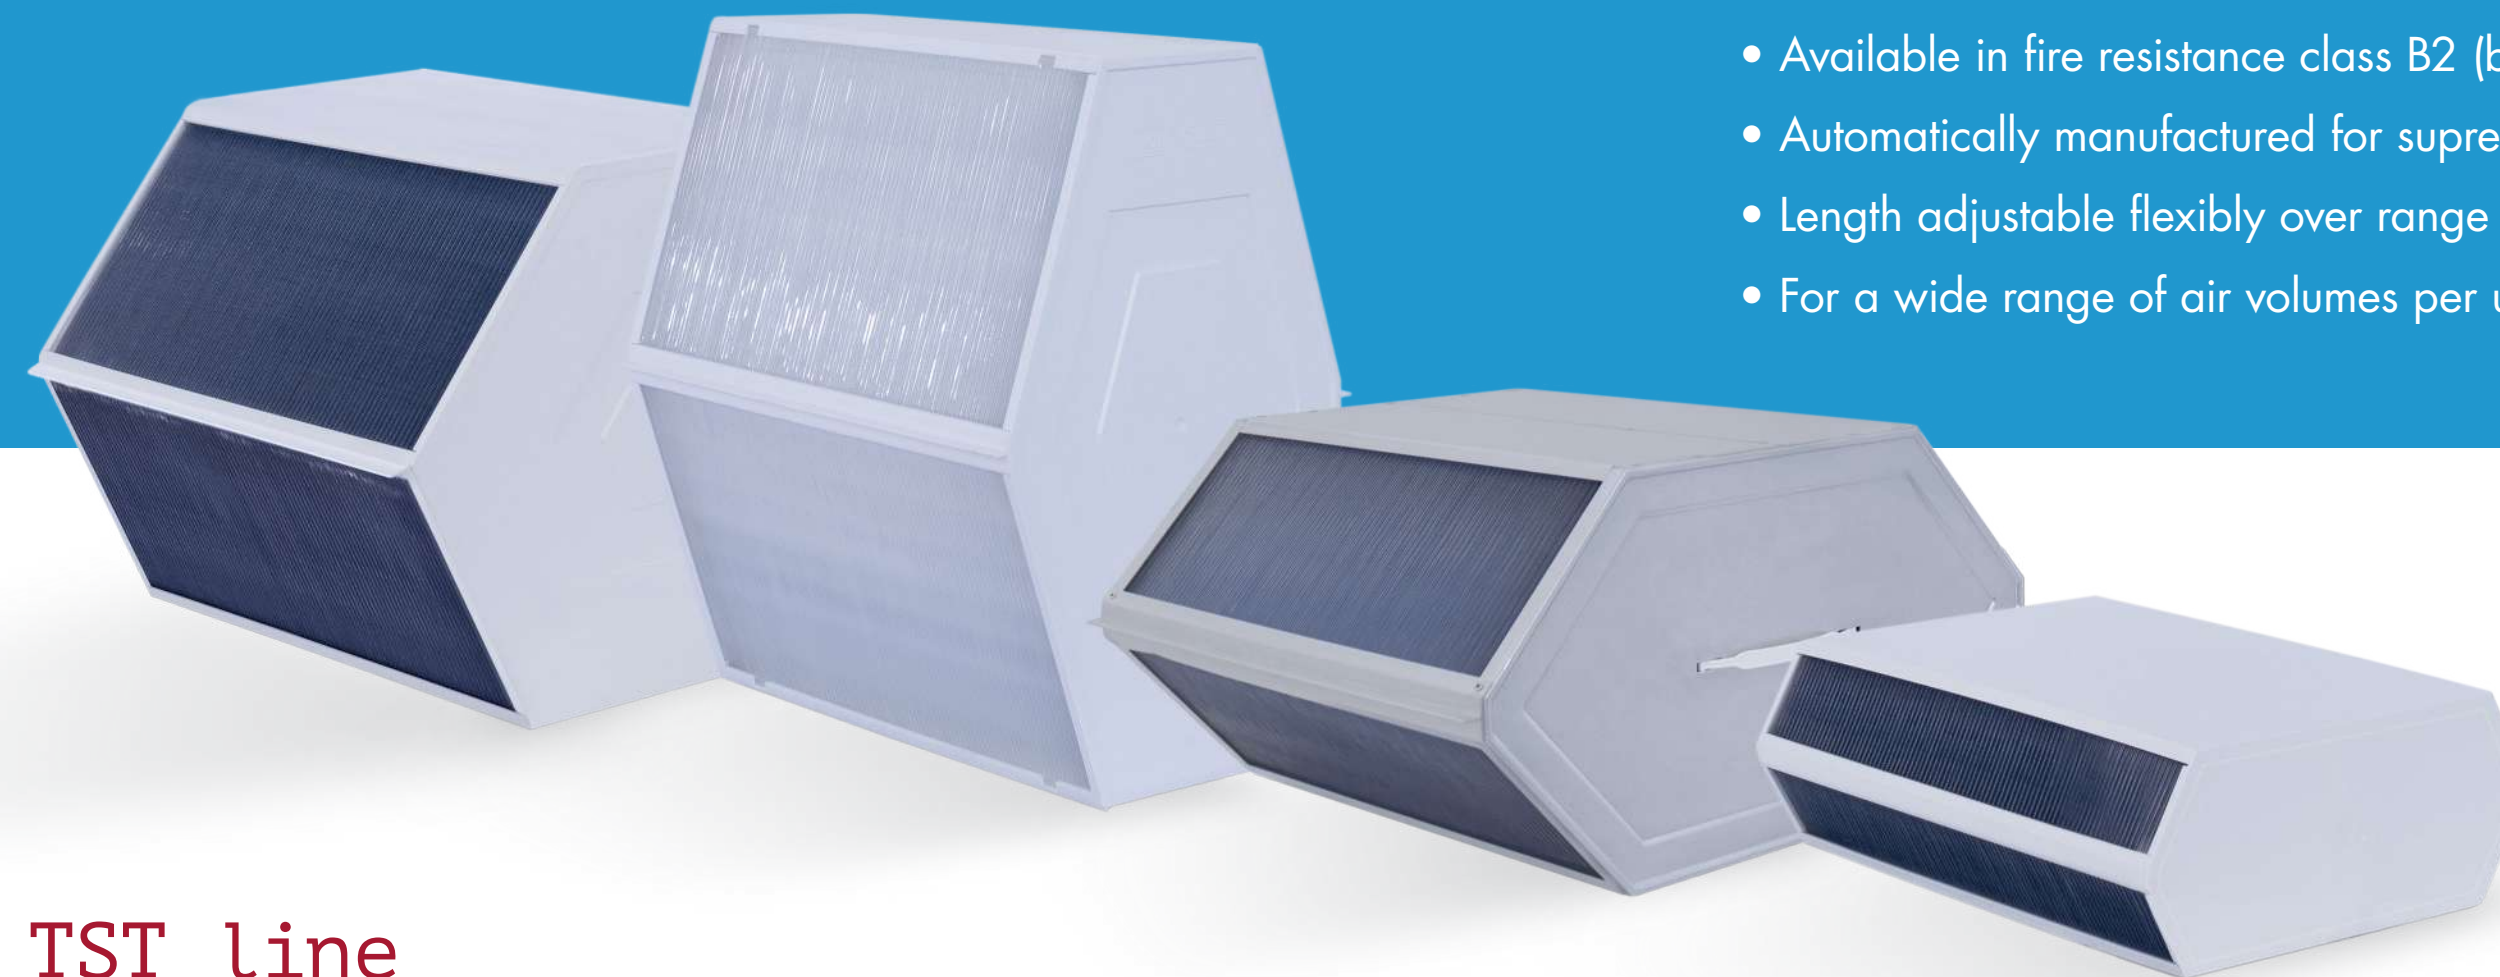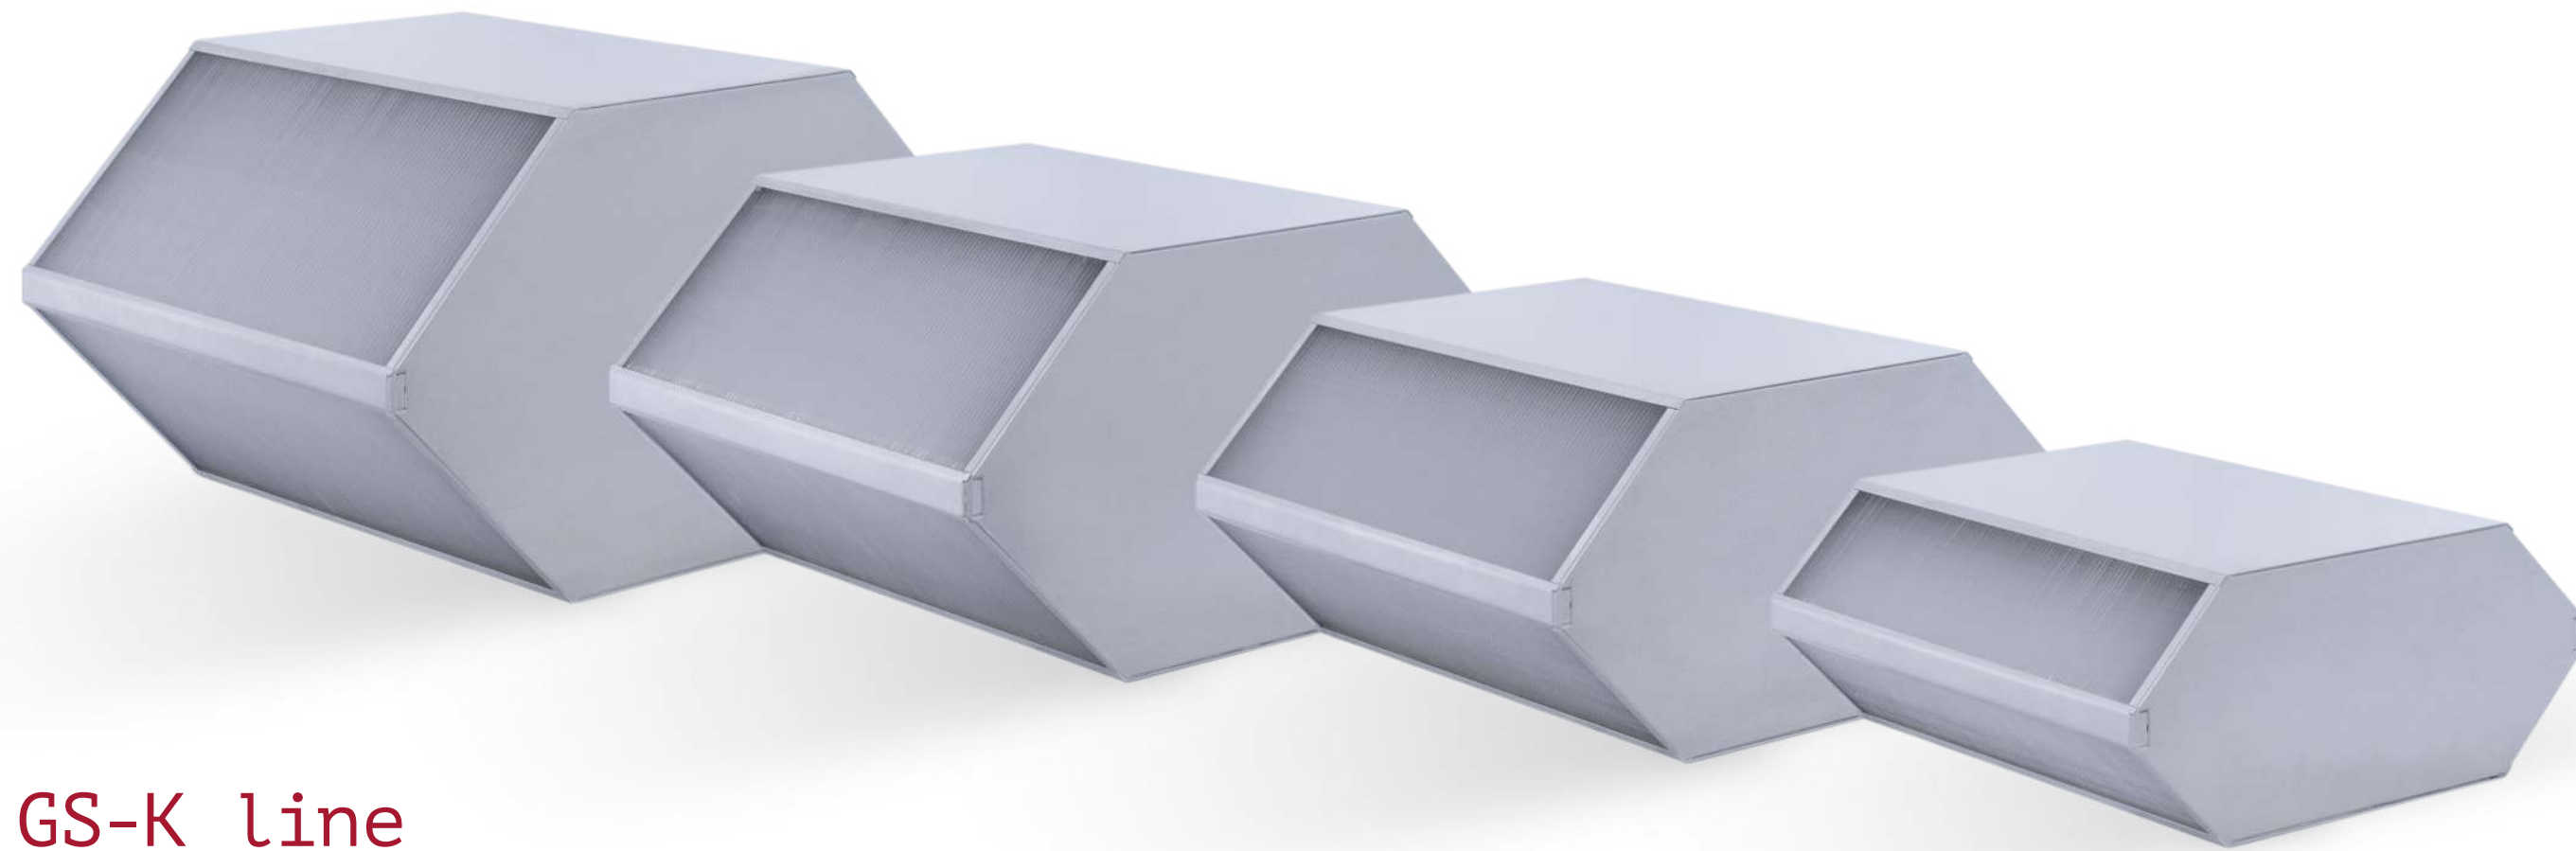


TST line

- Available in fire resistance class B2 (blue tinted foil) and standard (transparent foil)
- Automatically manufactured for supreme quality
- Length adjustable flexibly over range from 100 to 600 mm
- For a wide range of air volumes per unit




Type	A (mm)	B (mm)	C (mm)	X (mm)
GS-K18	397	172	107	100-600
GS-K25	454	230	148	100-600
GS-K30	496	271	177	100-600
GS-K35	537	312	206	100-600


GS-K line

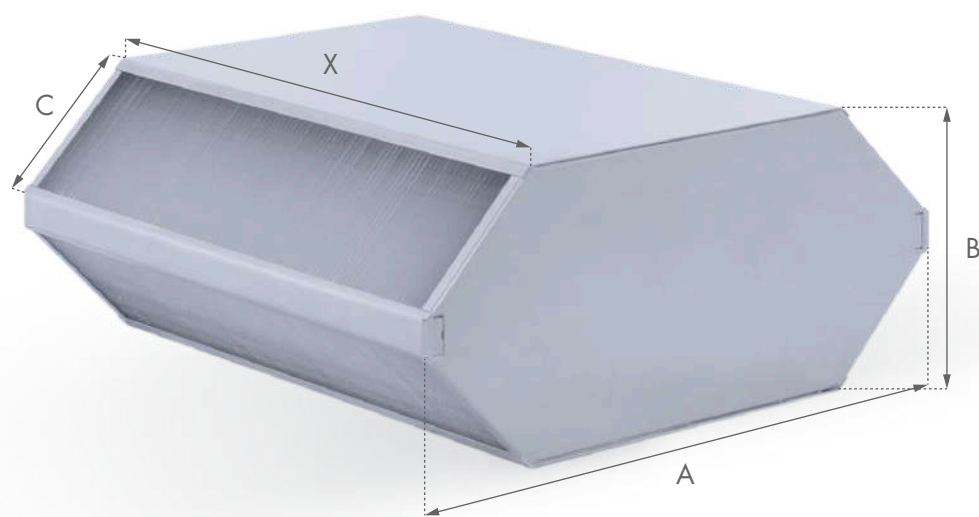


GS-K18

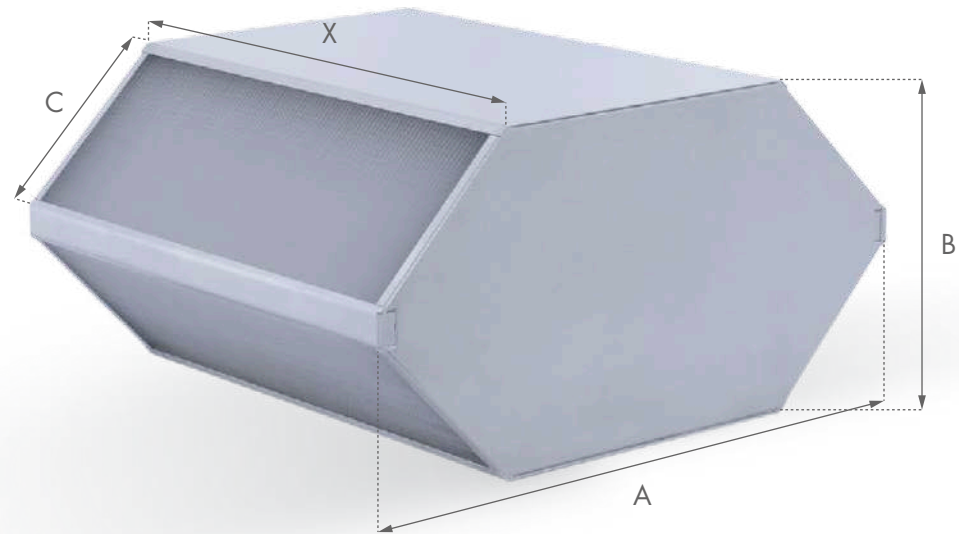

GS-K25

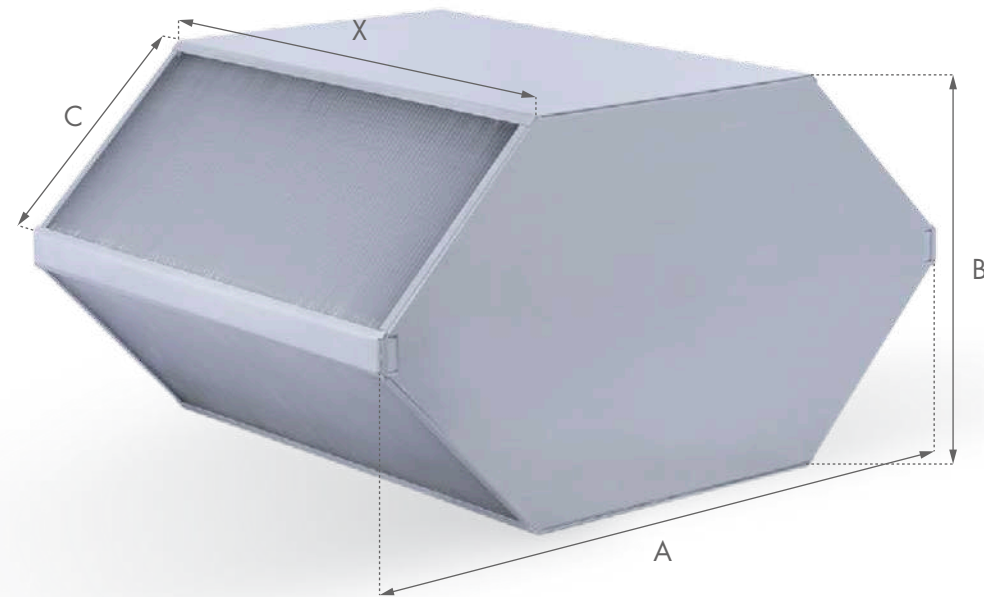

GS-K30

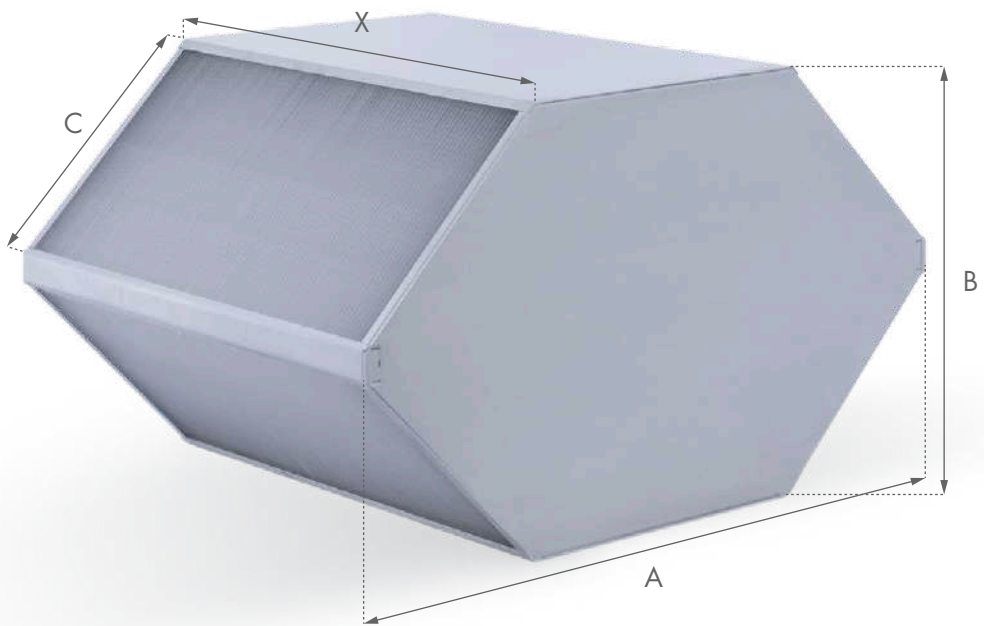


GS-K35




Type	A (mm)	B (mm)	C (mm)	X (mm)
TST366	366	366	196	100-600
TST27	270	450	236	100-600
TST25	458	230	145	100-600
TST15	318	138	74	100-600


TST line

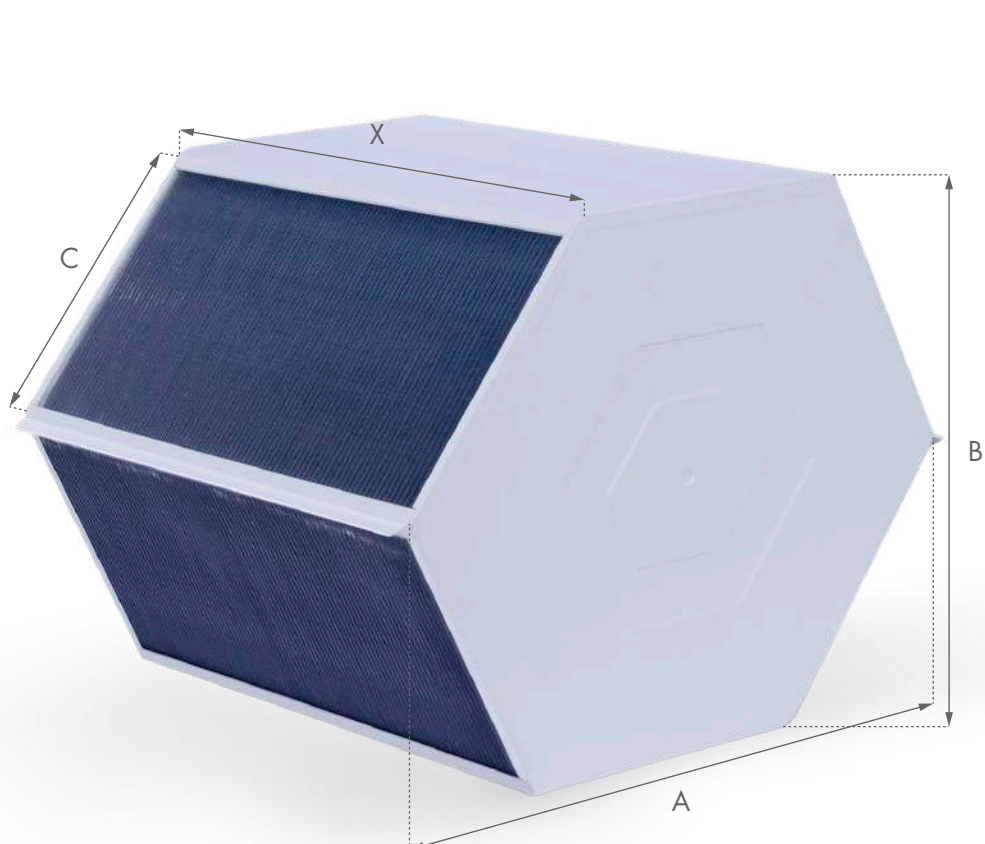


TST366

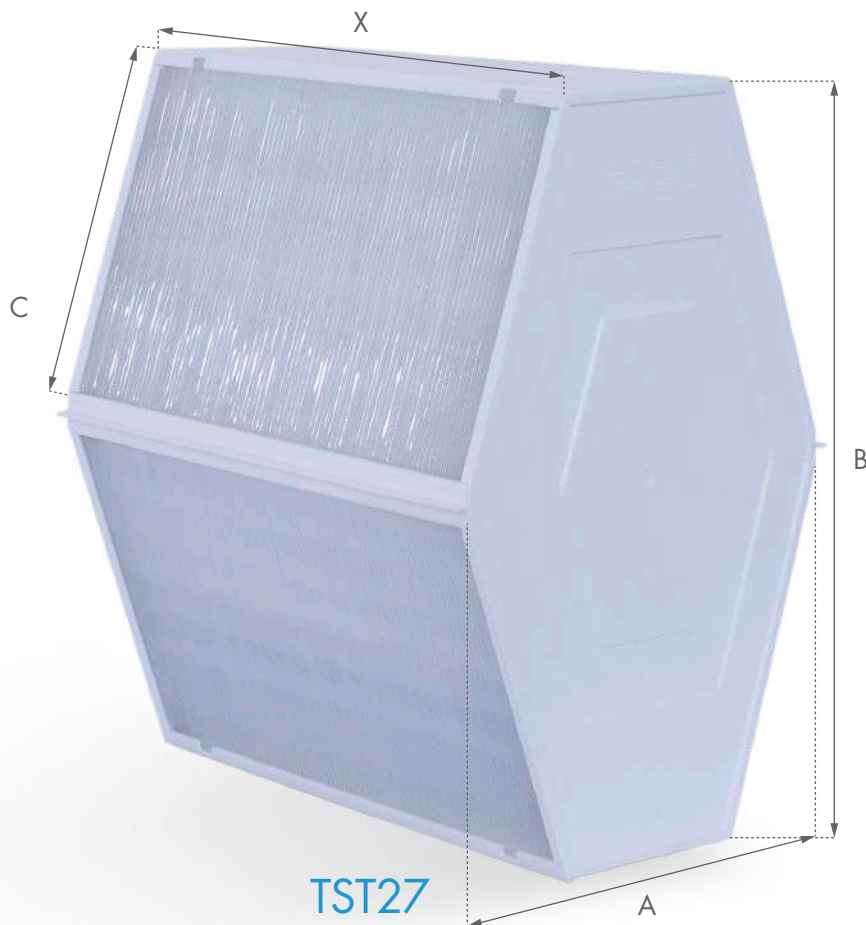

TST27

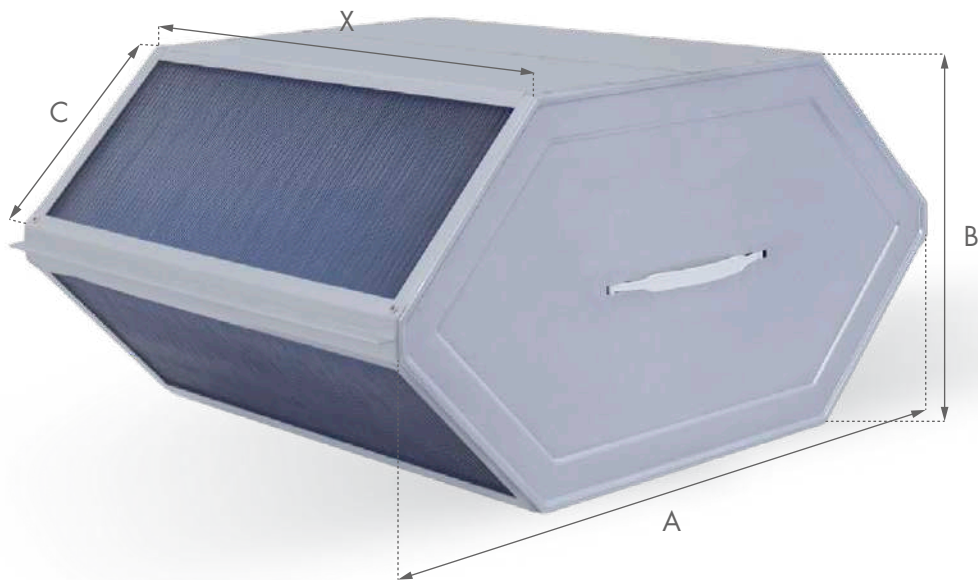


TST25

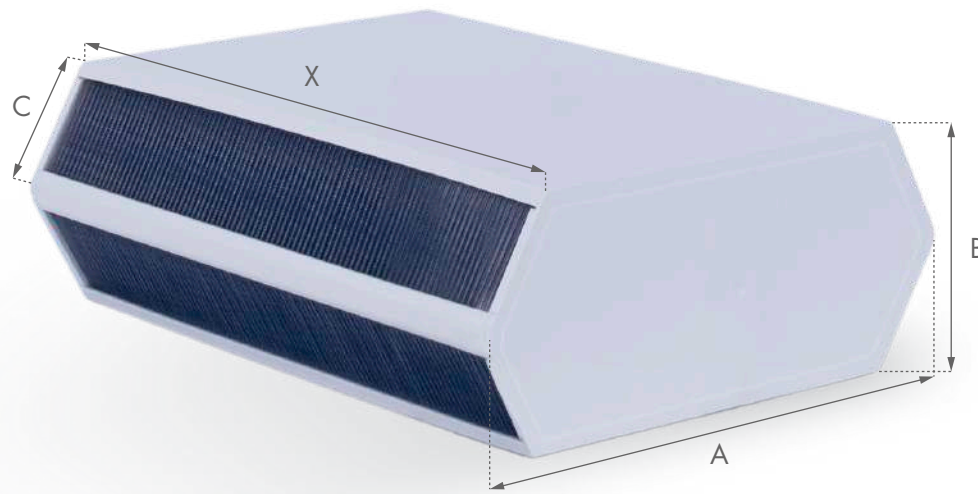

TST15


Standard Air Volume [m³/h]

Unit width [mm]

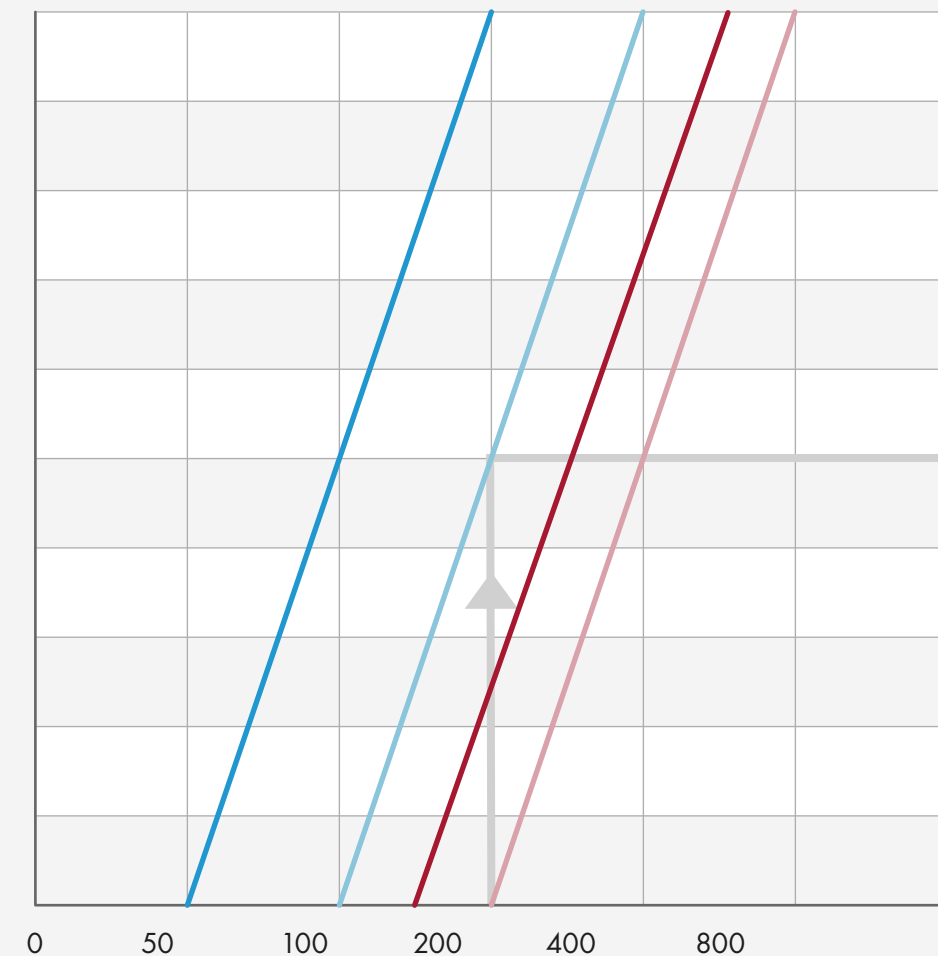


— 200 — 300 — 400 — 500

Pressure drop [Pa]

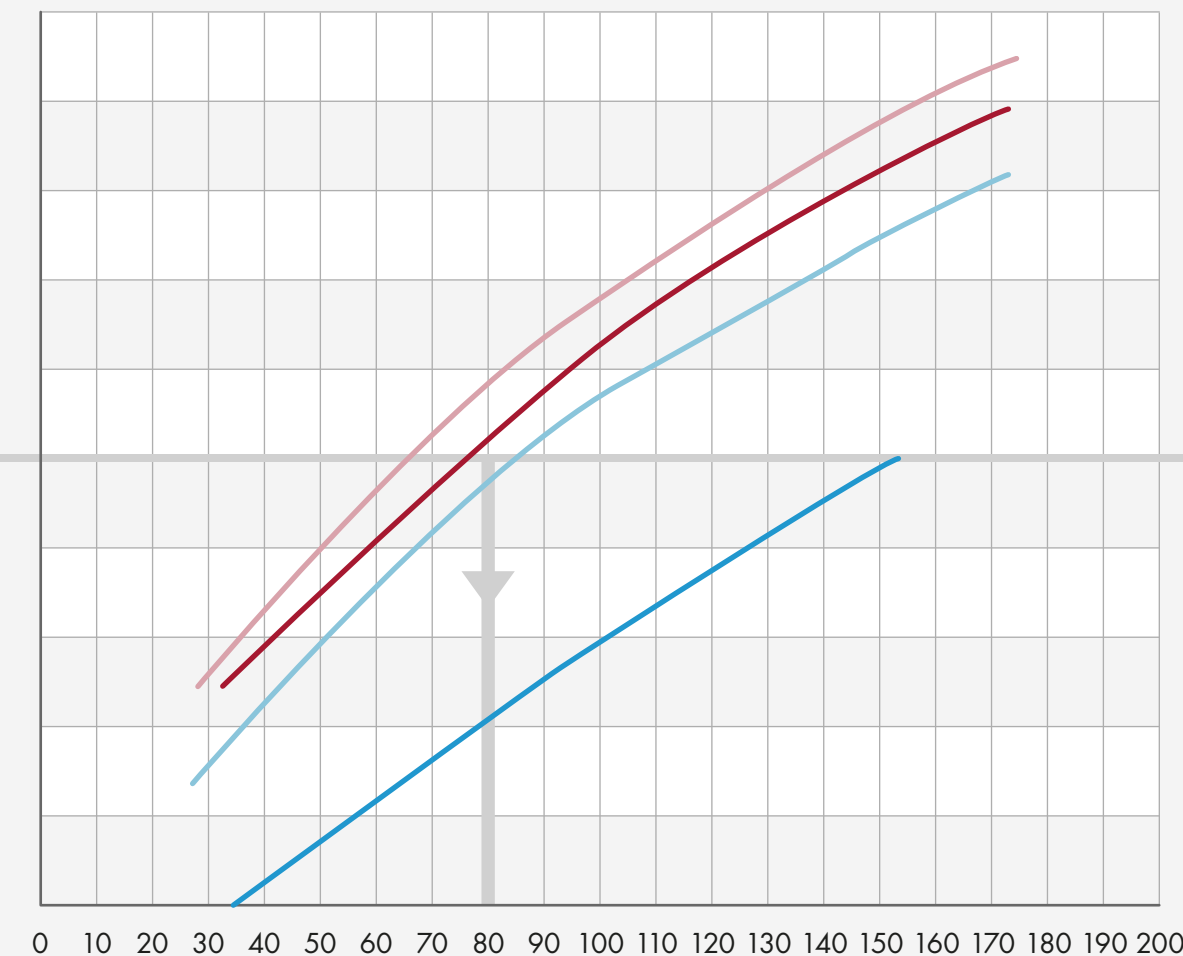

— 18 — 25 — 30 — 35

Efficiency [%]

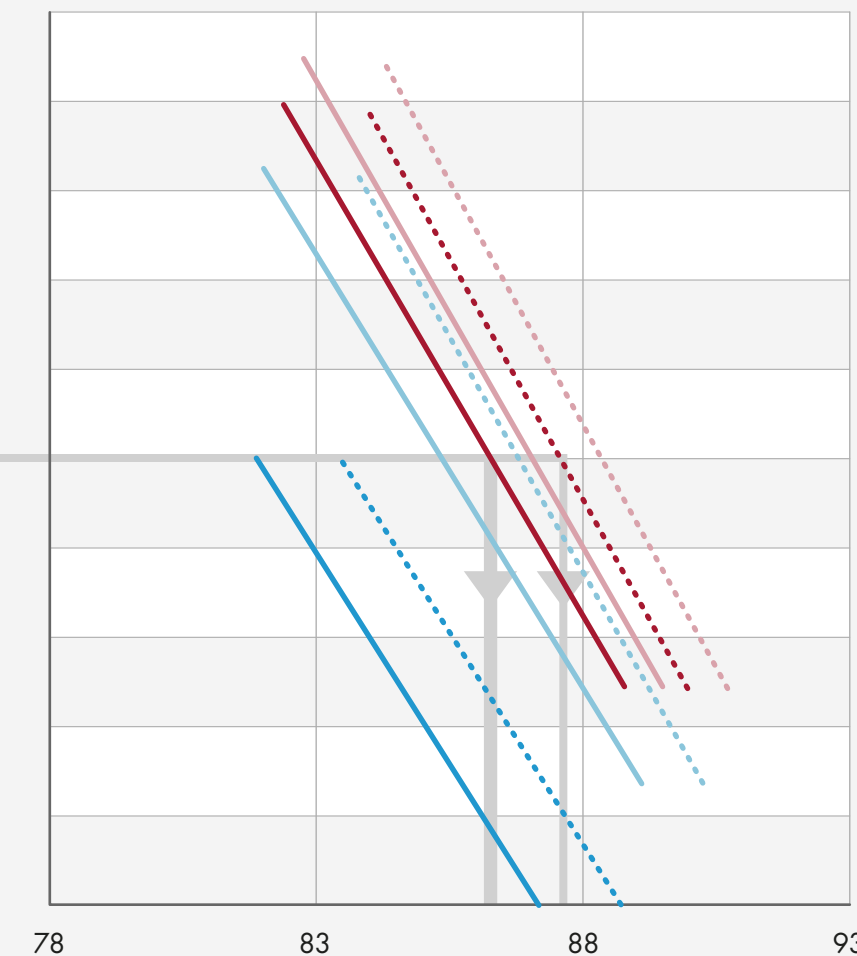

DRY — 18 — 25 — 30 — 35
WET ... 18 ... 25 ... 30 ... 35

GS-K line


Up to 95% thermal efficiency with lowest pressure loss.

Thanks to the specific design, a Holmak heat exchanger achieves high energy efficiency combined with lowest pressure loss across the entire range of air volumes.

- For a wide range of air volumes per unit
- Up to 95 % thermal efficiency with lowest pressure loss
- Lowest SFP (specific fan power) is obtained


Standard Air Volume [m³/h]

Unit width [mm]

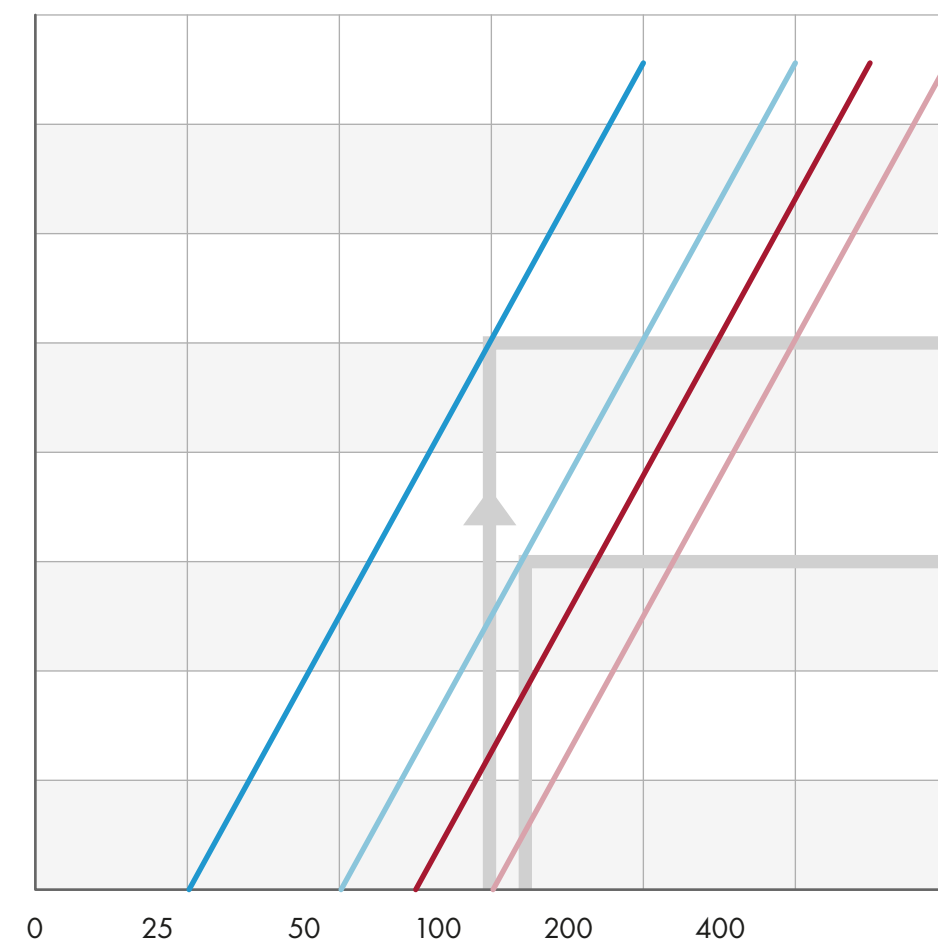


— 200 — 300 — 400 — 500

Pressure drop [Pa]

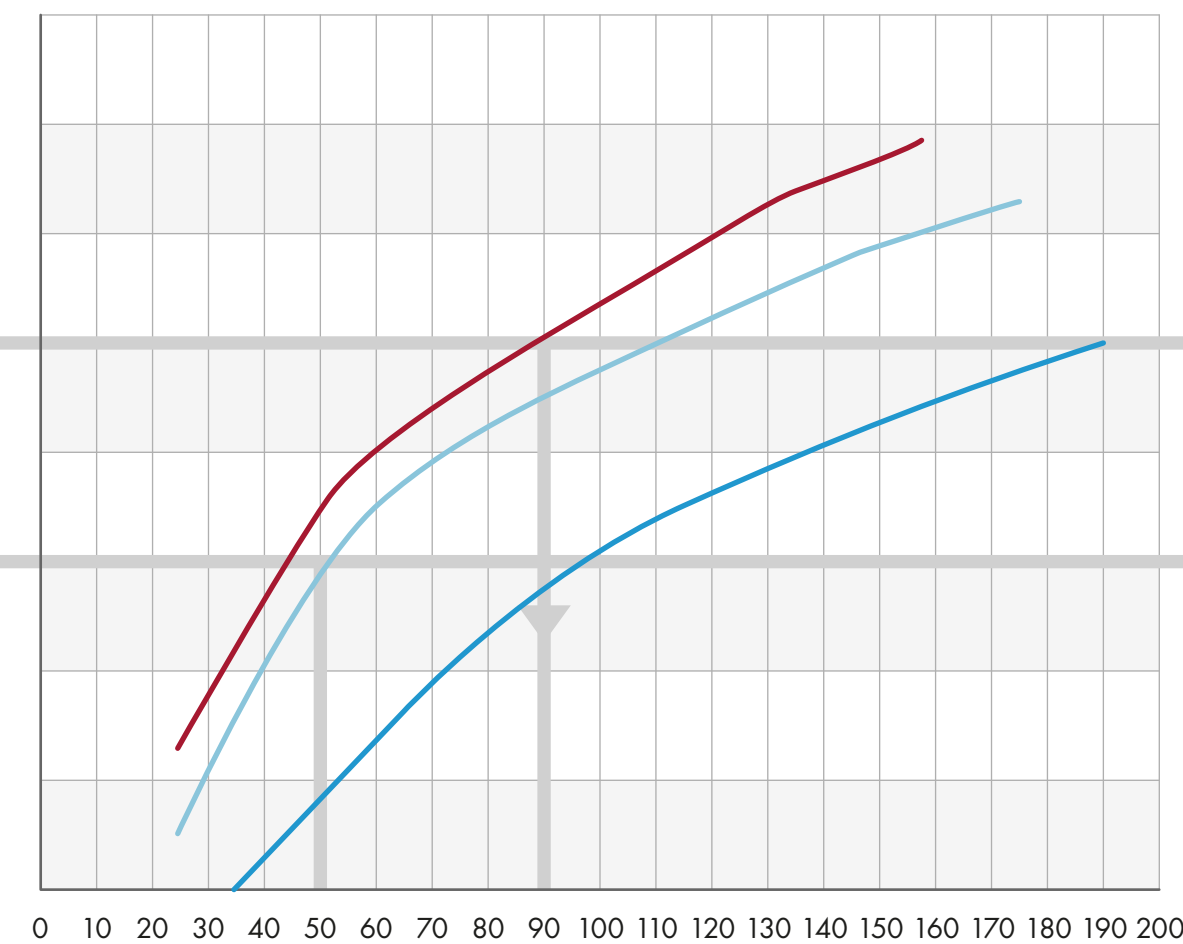

— 15 — 25 — 366

Efficiency [%]

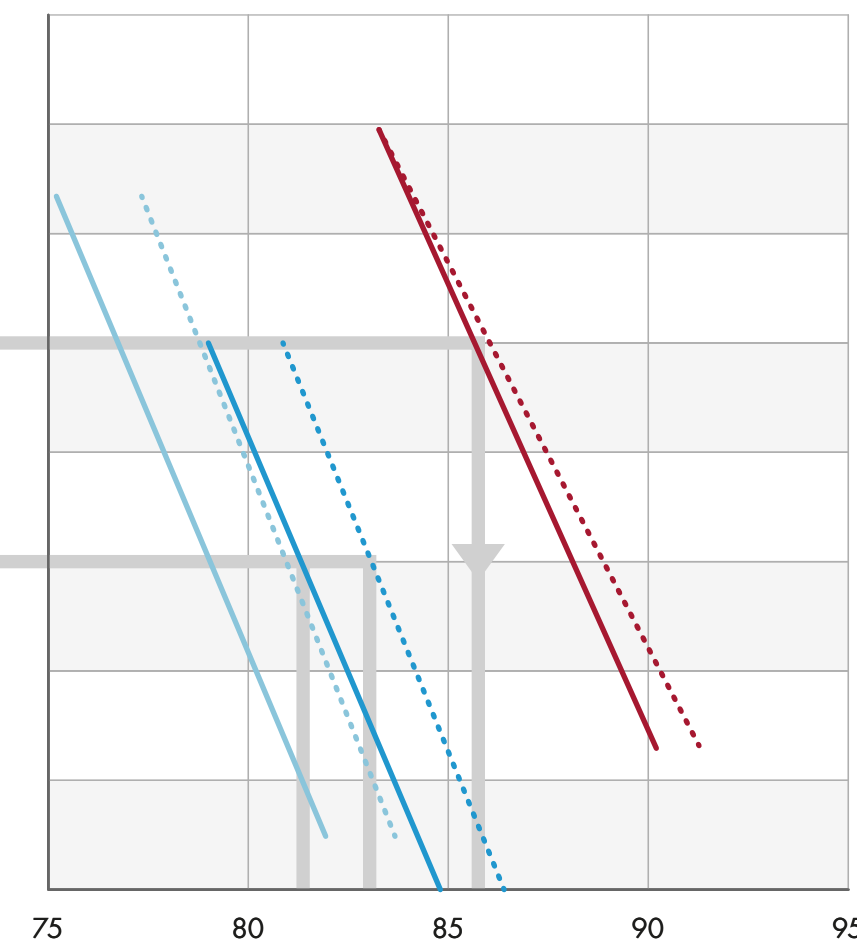

DRY — 15 — 25 — 366
WET ... 15 ... 25 ... 366

TST line

Cutting-edge technology for customers who expect more.

We are constantly testing new materials and designs in an effort to provide our customers with an innovative range of products, featuring state-of-the-art technology.

We are researchers.

We work with the most modern calculation software in order to continuously optimize the air flow and thermodynamics of our designs.

We are developers.

In testing new materials and concepts, we are able to constantly improve both our products and our own level of expertise. We work close with technical universities.

Please visit our website to download our calculation software: **www.holmak.eu**



This is Holmak

Specialist for air heat exchangers.

In focusing on counterflow heat exchangers, we declare our commitment to keep continuously optimising this technology.

Netherlands

HOLMAK HEATX B.V.

WETHOUDER WASSEBALIESTRAAT 8
7951 SN STAPHORST
+31 522 469 900

North Macedonia

HOLMAK D.O.O.E.L.

KIRIL VANGELOV MAKEDONSKI BR. 50
7000 BITOLA

Holmak was established in 2007 under a Dutch management as a production company in North Macedonia. Research & Development as well as Design and Sales and part of the Production are based in Staphorst, the Netherlands. Holmak is a subsidiary of CENTROTEC Sustainable SE, a German listed company that has specialized in energy-efficient heating, ventilation and thermal technology in buildings. The group has around 3,500 employees and enjoys a presence in more than 50 countries. Holmak focuses on the development and production of air to air heat exchangers that operate using highly efficient counterflow technology. State-of-the-art machinery and technologies, along with an experienced workforce, guarantee high product quality.

Holmak is part of the CENTROTEC Group

www.centrotec.de



info@holmak.eu • **www.holmak.eu**

